


HC1500



DLP® HOME THEATER PROJECTOR



SCREEN		DISTANCE FROM SCREEN (L)				Hd			
Diagonal Size	Height	Width		Max.Zoom	Min.Zoom	inch	cm		
inch	cm	inch	cm	inch	m	inch	cm		
40	102	19.6	50	34.9	89	56	1.4	6.6	17
60	152	29.4	75	52.3	133	85	2.2	103	2.6
80	203	39.2	100	69.7	177	114	2.9	139	3.5
100	254	49.0	125	87.2	221	143	3.6	174	4.4
150	381	73.5	187	130.7	332	216	5.5	262	6.6
200	508	98.1	249	174.3	443	289	7.3	349	8.9
250	635	122.6	311	217.9	553	362	9.2	-	-
275	699	134.8	342	239.7	609	398	10.1	-	-

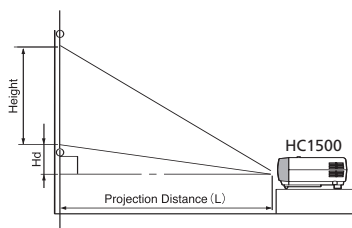


Unit measured in inches. *Hd is distance from lens axis to image bottom. The above numbers are approximate values.

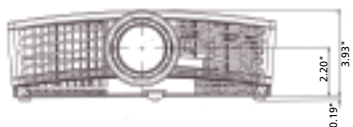

Unit measured in inches

DISPLAY TECHNOLOGY	0.62" 1-Chip DMD, 12deg. LVDS DarkChip2™ with DDP3020
RESOLUTION	1280 x 720 (Total 921,600 pixels)
BRIGHTNESS	1600 ANSI Lumens
CONTRAST RATIO	2500:1
ZOOM/FOCUS	Manual Focus & Zoom Lens
PROJECTION LENS	F=2.4-2.6, (142" inches@100")
THROW RATIO	1.59 – 1.97
OFF SET AXIS	4 : -1up (no variable lens shift)
PICTURE SIZE	40 -275 inches
COLOR WHEEL	7 segment (R/G/B/W/R/G/B)
SOURCE LAMP	Normal Mode: 200W (Shut Off Time: 2000hrs), Low Mode:160W (Shut Off Time: 3000hrs)
PC COMPATIBILITY	Resolution: 640x480 - 1280x720 + Compressed 1280 x 1024, Sync on Green available
VIDEO COMPATIBILITY	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60, Component Video: 480i/p(525i/p), 576i/p(625i/p), 720p(750p 50/60Hz), 1080i(1125i 60Hz), 1080i(1125i 50Hz), SCART (RGB + 1V sync)
INPUT TERMINALS	RGB: Mini D-sub 15pin x 1 HDMI x 1 Audio: N/A Video: RCA x 1 + S-VIDEO x 1, RCA (Y, CB, CR) x1
OUTPUT TERMINAL	12V Trigger Out, Stereo mini jack (ø3.5mm) x 1
COMMUNICATION TERMINAL	RS232C: 8pin x1 (Direct command is available), USB (Only for service)
SCANNING RATE	[H] 15 - 80 kHz, [V] 50 - 85 Hz, [Dot clock] max.110 MHz
AUDIO SPEAKER	N/A
HEIGHT ADJUSTER	One push rear leg (-1 to 7 degree variable)
HAND REMOTE UNIT	Full projector control, Back lit keys, Functions with AV memory
POWER CONSUMPTION	280W / 2.9A
DIMENSION	12.2" x 3.9" x 9.6" inches (310 x 100 x 245mm) (WxHxD excluding height adjustment)
WEIGHT	6.5 lbs (2.9kg)
POWER REQUIREMENTS	AC 100-240V, 50/60Hz
FAN NOISE	31dBA (Low Mode 25dBA)
SUPPLIED ACCESSORIES	<ul style="list-style-type: none"> Power cable Remote Control (with batteries) RGB Cable User-Manual (CD-ROM) RS232 Cable Safety manual (with Quick Start Guide)
OPTIONAL ACCESSORIES	Replacement Lamp (VLT-HC910LP), Ceiling Mount (PROJ-UCM), Hard Shell Rolling Case (DKT1-ATAC), Soft Projector Case (XL1-SSCC), Soft Shell Rolling Case (DKT1-SRCC)
WARRANTY	1-Years on Parts and Labor, 90-Days on lamp
OUTSTANDING FEATURES	<ul style="list-style-type: none"> Native Hi-definition 720P resolution Exclusive Mitsubishi BrilliantColor® technology Filter-free design Digital Keystone Correction (Vertical/Horizontal) 7-segment color wheel (R/G/B/W/R/G/B) Password Lock (menu access only)

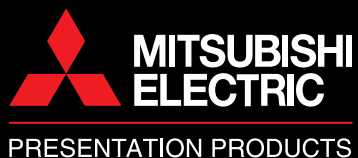

MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.
 Presentation Products Division
 Toll Free: 888.307.0349
 Email: ppdinfo@mdea.com
www.mitsubishi-presentations.com

Canada
 Mitsubishi Electric Sales Canada Inc.
 Information Technologies Group
 Phone: 905.475.7728
www.mitsubishielectric.ca

©2007 Mitsubishi Digital Electronics America, Inc. Standard features, options and specifications subject to change without notice. The DLP™ logo and DLP™ medallion are trademarks of Texas Instruments. All other trademarks are the property of their respective holders.
 *The projector lamp contains mercury. Please dispose of properly.

PP6016-5/07-15M-LITHC1500