

Mitsubishi

HC2

Home Theater Projector



Photo courtesy of Draper, Inc.



SPORTS: See and experience all the action like never before.



VIDEO GAMES: Your favorite games take on a new dimension in fun.



INTERNET: Unleash the power of the internet in a big way.



MOVIES: Make sure you have plenty of popcorn for watching your favorite movies.

Larger Than Life Entertainment

Mitsubishi's HC2 ColorView™ projector is designed specifically for home theater enthusiasts. Affordable, portable, and more streamlined than bulky plasma or projection televisions, the HC2 ColorView projector provides crisp, clear images from DVDs, HDTV signals, computers, or VCRs. It offers today's popular 4:3 aspect ratio, and combined with a versatile Learning Remote, advanced color controls, high contrast ratio and high brightness, the HC2 projects a large dynamic image that is perfect for movies, sporting events, internet, or video games. When you want the very best in projection display technology, bring home Mitsubishi's HC2 ColorView projector.

The Basics For Home Installation.



- DVD Player
- Computer
- VCR
- HDTV Input
- Gaming Device



PRESENTATION PRODUCTS
REVOLUTIONIZINGCOLOR™

HC2 ColorView™ Projector



ColorView™ Natural Color Matrix

The HC2 produces vivid colors that precisely match their real-life counterparts, as well as giving you the ability to precisely adjust color saturation and control color tones.



Without ColorView



With ColorView

Precise Color Reproduction With sRGB



Developed to ensure standard, uniform color reproduction regardless of the type of display used, sRGB color profile uses color coordinates common to all display technologies.



IRIS® (Intelligent Room Illumination Sensor)

Room illumination can have a significant effect on the quality and accuracy of color reproduction on-screen. The brighter the room, the duller the color. The HC2's built-in IRIS® automatically detects light volume and color density, automatically adjusting mid-range color tones as required for optimal color reproduction under any lighting conditions.




A change in external light makes the room brighter.



With IRIS

Input And Output Terminals

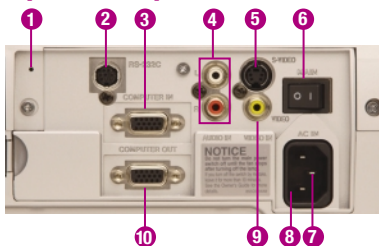


- 1 Reset button
- 2 RS-232C (DIN 8P) terminal
- 3 COMPUTER IN terminal (D-Sub mini 15P)
- 4 Audio input terminal
- 5 S-video input terminal
- 6 Main Power
- 7 Ground Terminal
- 8 Power Jack
- 9 Video input terminal
- 10 COMPUTER OUT terminal (D-Sub mini 15P)

Specifications

| | |
|-------------------------|---|
| Display Technology | 0.7" polysilicon TFT panel x3 |
| Resolution | SVGA 800 x 600 native, SXGA (compressed) 1280 x 1024 max., 600 viewable video lines |
| Brightness | 1100 ANSI Lumens |
| Contrast Ratio | 600:1 (full-on, full-off) |
| Projection Lens | F = 1.9 – 2.2; f = 27 – 32 mm 100" from 150" – 177" |
| Zoom/Focus | Manual zoom and manual focus lens 1.2:1 |
| Picture Size | 30" ~ 300" (aspect ratio 4:3) (16:9 wide screen supported) |
| User Replaceable Lamp* | 150 W UHP safety lamp (2500 hour max. lamp life) |
| Computer Compatibility | VGA ~ SXGA 640 x 480 ~ 800 x 600, compressed 1024 x 768 True: 800 x 600, Sync on green available |
| Video Compatibility | NTSC/NTSC 4.43/PAL (including PAL-M, N)/SECAM/PAL-60/DVD (component) HDTV input ready (525p, 720p, 1080i) |
| Input Terminals | RGB: mini D-sub 15 pin x 1, Video: RCA + S video x 1, Audio: RCA x 1 |
| Output Terminals | RGB: mini D-sub 15 pin x 1 |
| Audio Speakers | 1 W Mono |
| Scanning Rates | Horizontal: 15 - 82 kHz, Vertical: 50 – 85 Hz, Dot clock: 180 MHz |
| Learning Remote Control | Full projector control plus 2 additional video devices; PS2/Mac cursor control; laser pointer; wireless remote |
| Power Consumption | 230 W |
| Dimensions (W x H x D) | 9.3" x 4.2" x 12.4" (237 x 106 x 315 mm) legs and lens are included |
| Weight | 6.5 lbs. (2.9 kg) |
| Power Supply | AC 100 ~ 240V / +10%, 50/60 Hz |
| Safety Approvals | CSA, CSA NRT L/C, FCC Class-B |
| Warranty | Two-year parts and labor warranty and 90 day warranty on lamp (both warranties available in U.S. and Canada). |
| Accessories | Standard: AC power cable; D-sub RGB cable; RS-232C cable; AV cable; S-video cable; RGB cable for PC; remote control with battery; soft carrying case; lens cap; user and quick reference guide Optional: Spare lamp (Part No. VLT-HC2LP), ceiling mount bracket, upgraded carrying cases, ProjectorView™ Networking System |
| Special features | ColorView Natural Color Matrix; sRGB color compliance; digital keystone adjustment; zoom and focus lens; Picture-In-Picture; 3D CineView™; ProjectorView Networking System; IRIS® Contrast Control; Learning Remote Control |

For more information on the HC2 or any of Mitsubishi's other projectors or presentation products, contact Mitsubishi Digital Electronics today. Detailed technical specifications available upon request.



| Screen Diagonal Size (inch) | Distance from screen (L)/(approximate) | | Height Projected (inch) |
|-----------------------------|--|----------------------------|-------------------------|
| | Maximum zoom (WIDE) (inch) | Minimum zoom (TELE) (inch) | |
| 30 | — | 52 | 1.8 |
| 40 | 59 | 71 | 2.4 |
| 60 | 90 | 106 | 3.6 |
| 80 | 118 | 142 | 4.8 |
| 100 | 150 | 177 | 6.0 |
| 150 | 224 | 268 | 9.0 |
| 200 | 229 | 358 | 12.0 |
| 250 | 374 | 449 | 15.0 |
| 300 | 449 | 535 | 18.0 |

The above numbers are approximate, and may be slightly different from the actual measurements.



©2003 Mitsubishi Digital Electronics America, Inc. Standard features, options and specifications subject to change without notice. Microsoft, Windows, and the Windows logo are registered trademarks of Microsoft Corporation. Mac and the Mac logo are trademarks of Apple Computer, Inc, registered in the U.S. and other countries. All other trademarks or registered trademarks are the property of their respective holders. Home entertainment photos courtesy of Draper, Inc. *The projector lamp contains mercury. Please dispose of properly.

Printed on 50% recycled paper including 20% post-consumer fibers.

Mitsubishi Digital Electronics America, Inc.

Presentation Products Division
9351 Jeronimo Road
Irvine, CA 92618
Toll Free: 888-307-0349
email: ppdinfo@mdea.com
www.mitsubishi-presentations.com

Technical Support:

Toll Free: 888-307-0309
Email: tsupport@mdea.com

Canada:

Mitsubishi Electric Sales Canada Inc.
Information Technologies Group
Markham, Ontario
905-475-7728
www.mitsubishielectric.ca