




- Quick & easy to install
- Fits any minisplit up to 60,000 BTU/hr
- Installs inside evaporator, remotely above ceiling or inside lineset cover
- 12 months limited warranty
- Two reservoir options supplied
- Self priming pump - suction lift to 4ft
- Automatically operates on water rise
- Cleanable stainless steel filter
- Capacity – Mini Orange: 3.7 GPH @ zero head, 0.8 GPH @ 26ft. head
Maxi Orange: 10 GPH @ zero head, 3.8 GPH @ 65ft. head
- Quiet – Mini Orange 23 dB(A)
Maxi Orange 35 dB(A)
- Available in 115 or 230 V AC
- Push-in electrical terminals for quick connection of power and alarm wires
- Volt free N/O & N/C contacts switch off unit and activate optional alarm
- Kit includes all components required

mini & maxi orange pump


MINI ORANGE PERFORMANCE GRAPHS

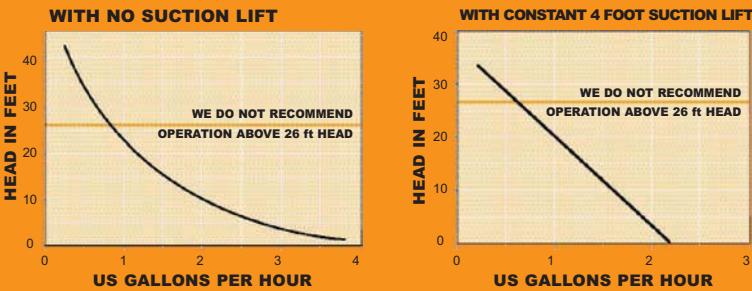

KIT INCLUDES

- Mini pump unit (2" x 4.8" x 1.4")
- Maxi pump unit (2.5" x 4.8" x 1.7")
- Assembled inline reservoir (1.56" x 2.75" x 1.56") complete with lid & sensor cable, float & filter
- Submersible (panmount) reservoir (1.56" x 2.75" x 1.56")
- Orange rubber connector tube
- 6" length of 1/4" i.d. vinyl breather tube
- 5 ft length of 1/4" i.d. vinyl discharge tube
- 6 ft orange power cable assembly
- 2 self-adhesive Velcro strips 3/4" x 2"
- 4 cable ties 12" x 1/8"
- Installation manual


MAXI ORANGE PERFORMANCE GRAPHS

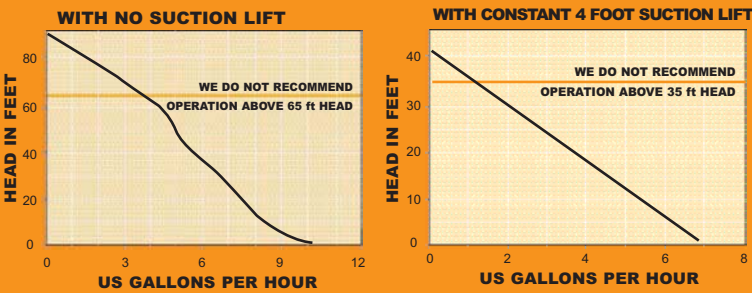

TECHNICAL DATA

	MINI ORANGE	MAXI ORANGE
Power supply & consumption:	115V AC 0.18A 15W 60Hz or 230V AC 0.11A 16W 60Hz	115V AC 0.28A 21W 60Hz or 230V AC 0.15A 21W 60Hz
Rating:	Continuously rated	Non-continuously rated - operating time: 5 mins on/ 5 mins off
Class:	Class I appliance	Class II appliance
Capacity:	3.7 GPH @ zero head, 0.8 GPH @ 26ft head	10 GPH @ zero head, 3.8 GPH @ 65ft head
Maximum head:	26ft	65ft
Sound level:	23dB(A)	35dB(A)
Minisplits up to:	24,000 btu/hr	60,000 btu/hr

SYSTEM LOCATION

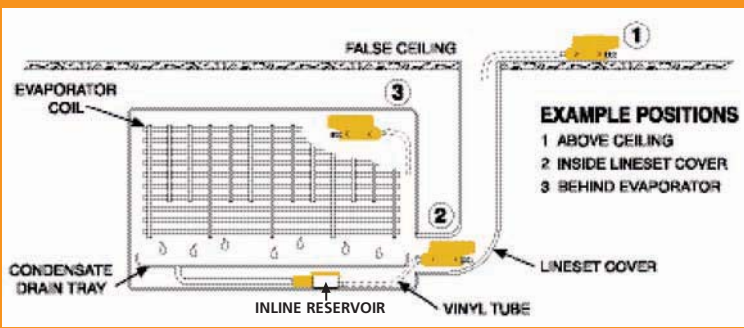

- 3A volt-free alarm wires, N/O N/C contacts rated @ 5A inductive at 115V or 230V AC
- Hall effect electronic water level sensors
- Thermally protected pump
- ETL® listed
- Suction lift: 4ft
- Discharge tube 1/4" i.d
- Gravity inlet
- Fully potted